#### PREDICTING CHARGES

- how do you figure out the charge that an element might take when it becomes an ion? - for many main group elements, you can predict the charge using the periodic table!

N

( )

Ne

Na Ma IIIB IVB VB VIB VIB VIIB VIIB IB IB IB AI SI P S CI Ar

Li

Be

K Ca Sc Ti V Cr Mn Fe Co Ni Cu Zn Ga Ge As Se Br Kr


Rb Sr Y Zr Nb Mo Tc Ru Rh Pd Ag Cd In Sn Sb Te I Xe


Cs Ba La Hf Ta W Re Os Ir Pt Au Hg TI Pb Bi Po At Rn

Fr Ra Ac Rf Db Sg Bh Hs Mt \*"inner" transition metals go here

Elements in group VIIIA - the "noble gases" - do not form ions!

Many OTHER main-group elements form either anions or cations that have the same overall number of electrons as the NEAREST (in terms of atomic number) noble gas!

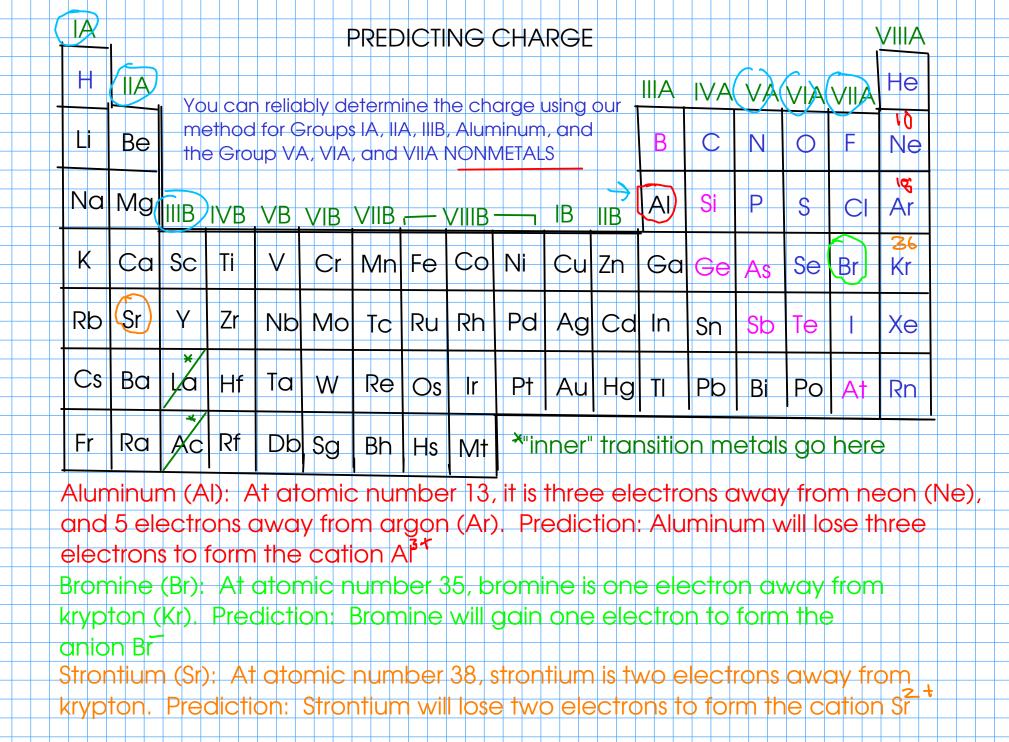

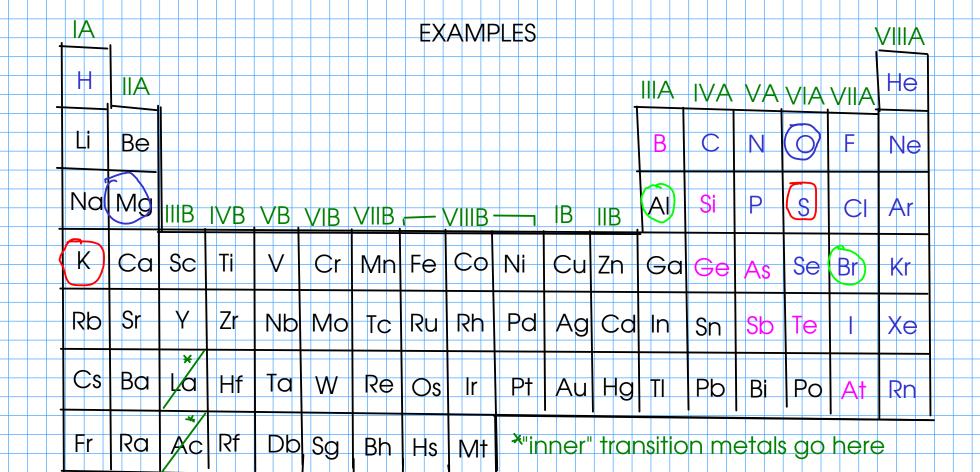

Find the formulas of:

(1) an ionic compound containing AI and Br

(2) an ionic compound containing Mg and O

(3) an ionic compound containing S and K

## Find the formula of:

\* an ionic compound containing AI and Br  $A \sqrt{3+}$   $R_{C}$ 

# Al Brz

Br

Br


Find the formula of:

an ionic compound containing Mg and O

Find the formula of:

\* an ionic compound containing S and K

MgO



Remember: When writing the formula of an ionic compound, always write the CATION (+ charge) first!


H	IIA											IIIA	IVA	VA	VIA	VIIA	He		
Li	Be											В	С	N	0	F	Ne		
Na	Mg	IIIB	IVB	VB	VIB	VIIB	<u>ا</u>	√IIIB		IB	IIB	AI	Si	P	S	CI	Ar		
K	Ca	Sc	Ti	V	Cr	Mn	Fe	Со	Ni	Cu	Zn	Ga	Ge	As	Se	Br	Kr		
Rb	Sr	Υ	Zr	Nb	Мо	Tc	Ru	Rh	Pd	Ag	Cd	In	Sn	Sb	Те		Xe		
Cs	Ba	ųå	Hf	Ta	W	Re	Os	Ir	Pt	Au	Hg	TI	Pb	Bi	Ро	At	Rn		
Fr	Ra	ÅC	Rf	Db	Sg	Bh	Hs	Mt	×"ir	*"inner" transition metals go here									
The transition metals always form CATIONS!																			
However, many transition metals are capable of forming SEVERAL DIFFERENT														JT					
CAI	CATIONS! 27 3t															2	+	31	

Example: Iron (Fe) forms two cations, depending on the situation:  $Fe^{2\tau}$  or Fe

#### TRANSITION METAL CATIONS

- So how do you know which cation you're dealing with? For now, you'll have to be told

- Either the chemical formula of an ionic compound or the name of an ionic compound can tell you what charge is on the transition metal cation.

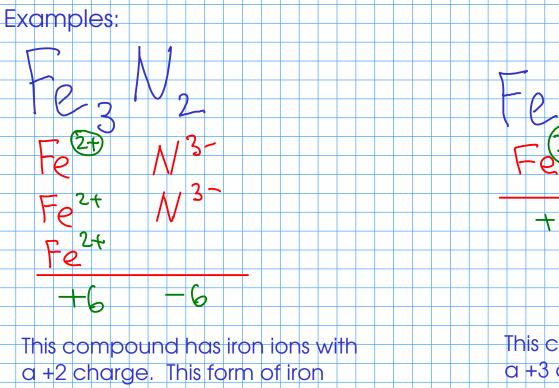


This compound has iron ions with a +2 charge. This form of iron is called "iron(II)" pronounced "iron two"! This compound has iron ions with a +3 charge. This form of iron is called "iron(III)" pronounced "iron three"!

-3

#### POLYATOMIC IONS

- Some MOLECULES can gain or lose electrons to form CATIONS or ANIONS. These are called POLYATOMIC IONS

- Polyatomic ions form ionic compounds in the same way that single-element ions do.

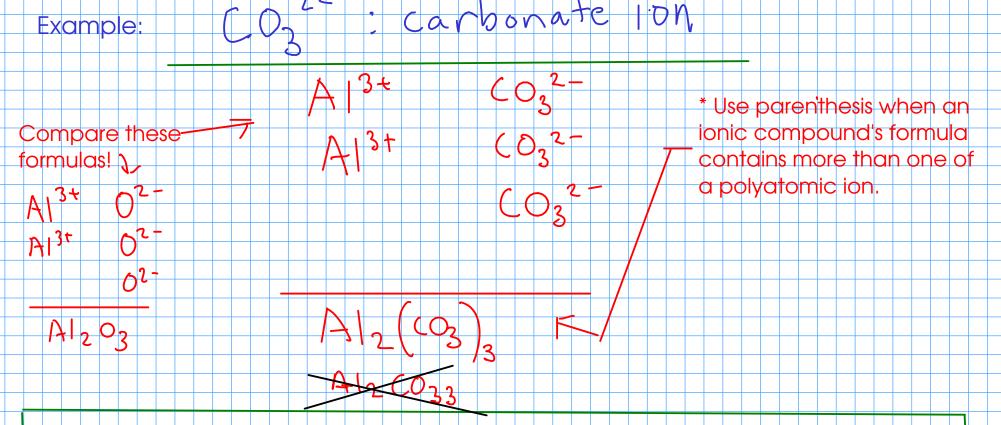

YOU MUST MEMORIZE THE NAMES AND FORMULAS OF THE MOST COMMON POLYATOMIC IONS. CHECK THE COURSE WEB SITE FOR A LIST!

#### NAMES OF IONS

- To properly discuss ions and ionic compounds, we have to know how to name them!

CATIONS

3 kinds:

3

) Main group cations (metals that take only one charge when forming ions)

- The element's name is the same as the ion's name!

Mg<sup>1</sup>: "magnesium ion"

Transition metal cations (from metals that can form several cations)

- The CHARGE of the cation must be given. Use a ROMAN NUMERAL after the element name to indicate charge!

Fe : "iron(II) ion" Cut: "copper(I) ion"


 3 t

 Fe
 : "Iron(III) ion"

Polyatomic cations


- Memorize list.

NH 🧃 : "ammonium ion'

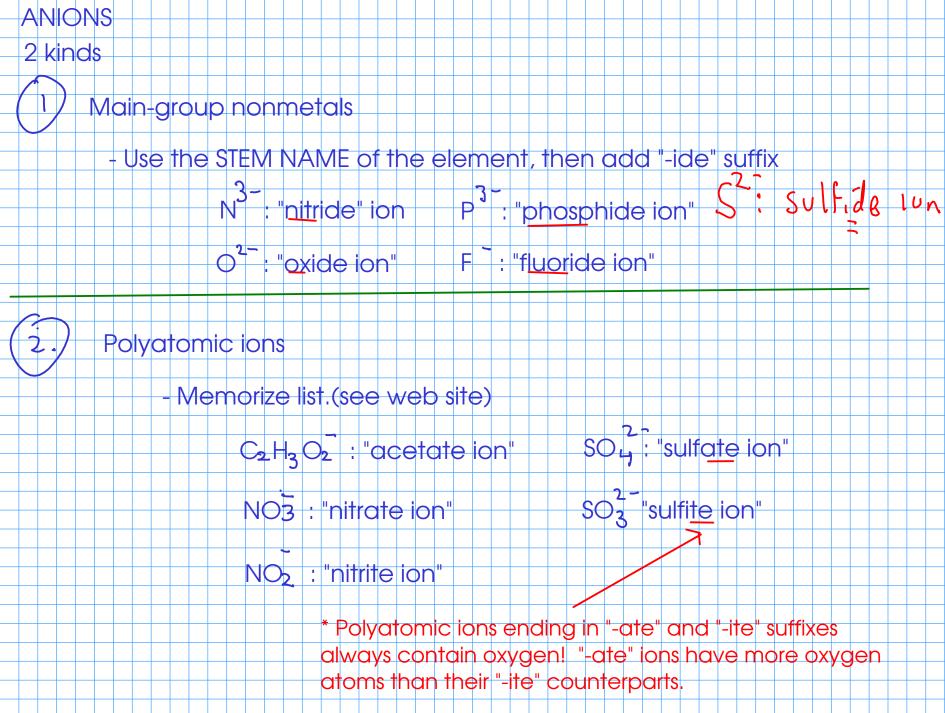

### NAMING IONIC COMPOUNDS

- The name of the compound is based on the name of the ions in the compound - Cation first, anion second (drop the word "ion")

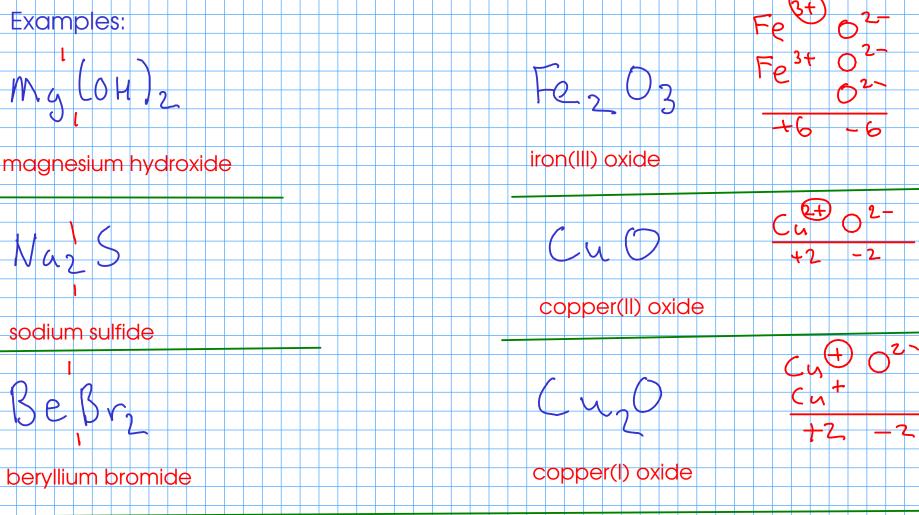

Remember to include the Roman numeral for CHARGE in the name of transition metal compounds!